


TIWINOK 品牌 11 系列高调心直线导轨 (俗称 HG) 法兰螺孔型滑块尺寸表

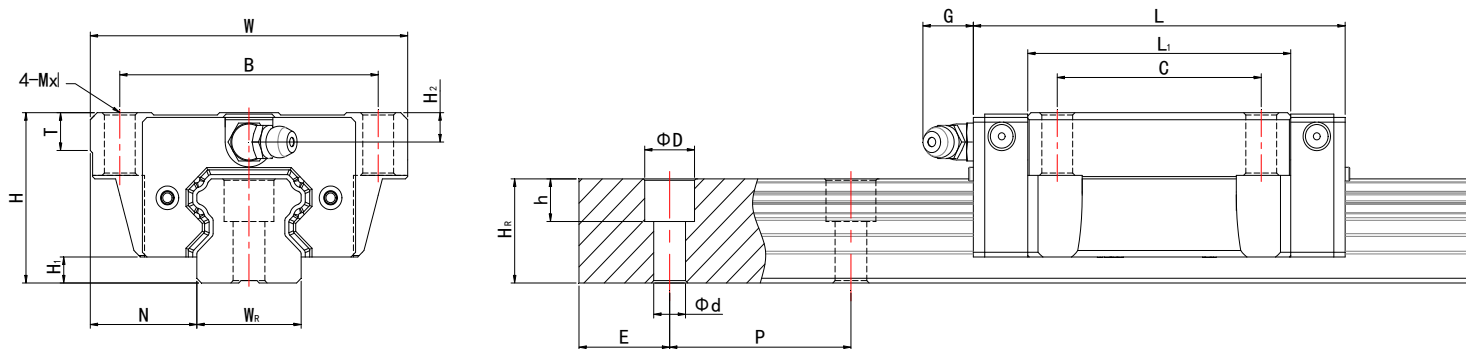

系列规格	滑块型号代码	组件尺寸 (mm)			滑块尺寸 (mm)							导轨尺寸 (mm)						导轨的固定螺栓尺寸 (mm)	基本动额定负荷 C (kN)	基本静额定负荷 CO (kN)	容许静力矩			重量				
		H	H1	N	W	B	C	L1	L	G	M×I	T	H2	WR	HR	D	h				d	P	E	MR kN-m	MP kN-m	MY kN-m	滑块 kg	导轨 kg/m
HG15	11511	24	4.3	16	47	38	30	39.4	61.4	5.3	M5×7	6	3.95	15	15	7.5	5.3	4.5	60	20	M4x16	11.38	16.97	0.12	0.10	0.10	0.17	1.45
	11518 11538	30	4.6	21.5	63	53	40	50.5 65.2	77.5 92.2	12	M6×9.5	8	6	20	17.5	9.5	8.5	6	60	20	M5x16	17.75 21.18	27.76 35.90	0.27 0.35	0.20 0.35	0.20 0.35	0.40 0.52	2.21
HG25	11512 11532	36	5.5	23.5	70	57	45	58 78.6	84 104.6	12	M8×10	8	6	23	22	11	9	7	60	20	M6x20	26.48 32.75	36.49 49.44	0.42 0.56	0.33 0.57	0.33 0.57	0.59 0.80	3.21
	11517 11537	42	6	31	90	72	52	70 93	97.4 120.4	12	M10×16	8.5	6.5	28	26	14	12	9	80	20	M8x25	38.74 47.27	52.19 69.16	0.66 0.88	0.53 0.92	0.53 0.92	1.09 1.44	4.47
HG35	11513 11533	48	7.5	33	100	82	62	80 105.8	112.4 138.2	12	M10×18	10	9	34	29	14	12	9	80	20	M8x25	49.52 60.21	69.16 91.63	1.16 1.54	0.81 1.40	0.81 1.40	1.56 2.06	6.30
	11514 11534	60	9.5	37.5	120	100	80	97 128.8	139.4 171.2	12.9	M12×25	15	8.5	45	38	20	17	14	105	22.5	M12x35	77.57 94.54	102.71 136.46	1.98 2.63	1.55 2.68	1.55 2.68	2.79 3.69	10.41
HG55	11515 11535	70	13	43.5	140	116	95	117.7 155.8	166.7 204.8	12.9	M14×17 (26)	17.5	12	53	44	23	20	16	120	30	M14x45	114.44 139.35	148.33 196.20	3.69 4.88	2.64 4.57	2.64 4.57	4.52 5.96	15.08
	11516 11536	90	15	53.5	170	142	110	144.2 203.6	200.2 259.6	12.9	M16×23 (30)	25	15	63	53	26	22	18	150	30	M16x50	163.63 208.36	215.33 303.13	6.65 9.38	4.27 7.38	4.27 7.38	9.17 12.89	21.18

注：表中 HG45 以下法兰螺孔型滑块可以替代法兰光孔滑块，下锁使用；HG55、65 螺孔深度 | 括号中的数字为调整系列，订货前请提前确认螺孔深度。